

Tapered caps / plugs 24,7-27,7

Article Number: 300002160




Technical Data

| Attribute | Value |
|-----------------------|----------------|
| RoHS | RoHS compliant |
| Colour | red |
| Country of origin | Great Britain |
| Customs tariff number | 39269097 |
| Material | LDPE |
| Previous part number | 0040251 |
| Tolerance | 0,3 - 0,8 mm |
| Weight | 2,3 g |
| Bore diameter | 24,7 - 27,7 mm |
| External diameter | 32,0 mm |
| Immersion depth | 19 mm |
| Internal height | 19,0 mm |
| Pull-off strap | yes |
| Shape | round |
| Stem form | conical |

Description

The tapered series can either be used as a cap or a plug - depending on the application. It is perfectly suited for the protection of threads or to shield conduits and pipes from dirt and moisture. Tolerance = 0.3 - 0.8 mm. Used as a plug the stem diameter should exceed the bore hole by 0.2 - 0.8 mm. Used as a cap the inner diameter should be 0.2 - 0.8 mm smaller than the outer diameter you want to protect.

Drawing and Dimension Table

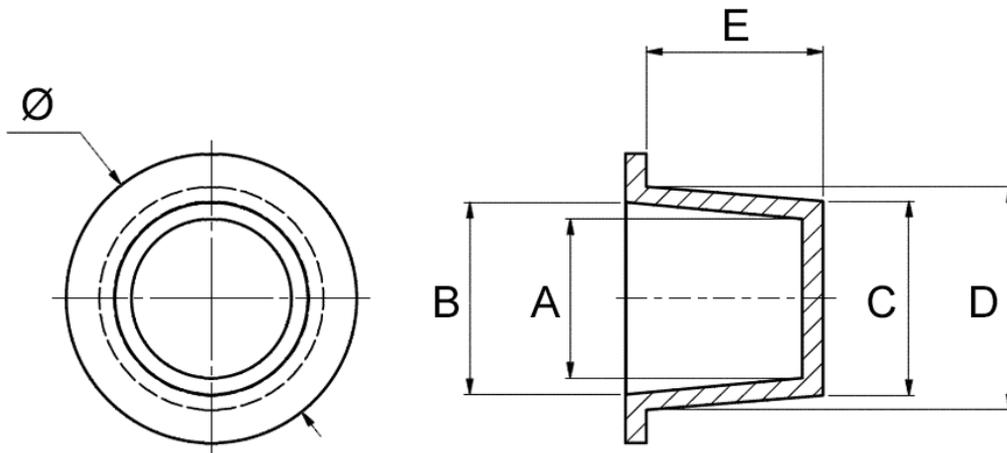

| Attribute | Value |
|-----------|---------|
| C | 24,7 mm |
| D | 27,7 mm |
| E | 19,0 mm |
| Ø | 32,0 mm |



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at sales@emico.com or by phone at +49 9621 67545-0.

The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.