

# Adj. plug for square pipe 40x40x1,5-2 8k

Article Number: 300011676




## Technical Data

| Attribute               | Value                 |
|-------------------------|-----------------------|
| RoHS                    | RoHS compliant        |
| Colour                  | black                 |
| Country of origin       | Germany               |
| Customs tariff number   | 39235010              |
| Material                | PA                    |
| Previous part number    | 0604040               |
| Weight                  | 26,85 g               |
| External pipe dimension | 40 mm                 |
| Max. load capacity      | 300 kg                |
| Pipe wall thickness     | 1,5 - 2,0 mm          |
| Shape                   | square                |
| Thread length           | 25,0 mm               |
| Thread size             | M22                   |
| Thread type             | integrated            |
| Version                 | with adjustment screw |
| Width across flat       | 28                    |

## Description

One-piece external body with injection-moulded thread. Octagonal screw head (except 0602020 + 0602222, hexagonal) Axial load capacity: M10 = approx. 100 kg / M16 = approx. 150 kg / >M22 = approx. 300 kg Load capacity: - The adjustment of the feet has to be effected unloaded - The axial static load indicated refers to a screw that is unscrewed by 10 mm and is seated on plane ground - The adjustable plugs are unsuitable to be used as load gliders - The adjustable plugs are not suitable for dynamic load

## Drawing and Dimension Table

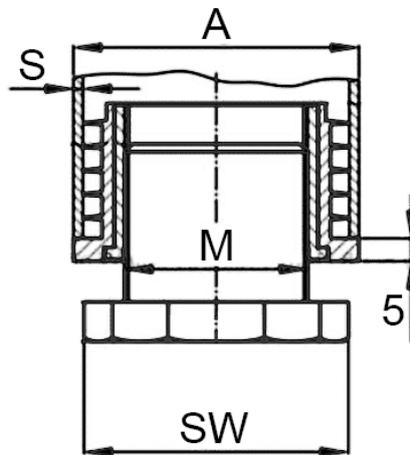

| Attribute | Value          |
|-----------|----------------|
| AxS       | 40x40x1,5-2 mm |
| M x L     | M22x25 mm      |
| SW        | 28             |



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at [sales@emico.com](mailto:sales@emico.com) or by phone at +49 9621 67545-0.

*The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.*