

Tapered plugs M20 / 16,3-18,6

Article Number: 300017201




Technical Data

Attribute	Value
RoHS	RoHS compliant
Colour	natural
Country of origin	Germany
Customs tariff number	39269097
Material	LDPE
Previous part number	4040163
Tolerance	0,3 - 0,8 mm
Weight	1 g
DIN	M20x1,5
DIN 13 regular type screw thread	M20
DIN 259 Whitworth pipe thread	M20x1,5
Bore diameter	16,3 - 18,6 mm
External diameter	22,0 mm
Immersion depth	13 mm
Shape	round
Stem form	conical

Description

The tapered series can either be used as a cap or a plug - depending on the application. It is perfectly suited for the protection of threads or to shield conduits und pipes from dirt and moisture. Many different dimensions for a lot of different types of threads. Please note: Tolerance = 0.3 - 0.8 mm Used as a plug the stem diameter should exceed the bore hole by 0.2 - 0.8 mm. Used as a cap the inner diameter should be 0.2 - 0.8 mm smaller than the outer diameter you want to protect.

Drawing and Dimension Table

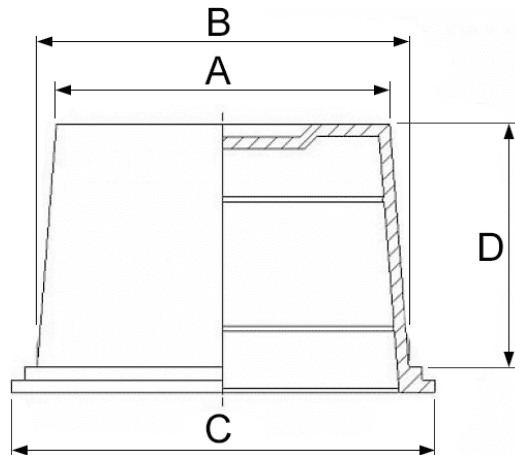

Attribute	Value
A	16,3 mm
B	18,6 mm
C	22,0 mm
D	13,0 mm



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at sales@emico.com or by phone at +49 9621 67545-0.

The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.