

Tapered plugs 20,5-23,3

Article Number: 300017206




Technical Data

Attribute	Value
RoHS	RoHS compliant
Colour	natural
Country of origin	Germany
Customs tariff number	39269097
Material	LDPE
Previous part number	4040205
Tolerance	0,3 - 0,8 mm
Weight	1,37 g
DIN	M24x0,75/M25x2
DIN 259 Whitworth pipe thread	M24x0,75/M25x2
Bore diameter	20,5 - 23,3 mm
External diameter	27,0 mm
Immersion depth	16 mm
Shape	round
Stem form	conical

Description

The tapered series can either be used as a cap or a plug - depending on the application. It is perfectly suited for the protection of threads or to shield conduits and pipes from dirt and moisture. Many different dimensions for a lot of different types of threads. Please note: Tolerance = 0.3 - 0.8 mm Used as a plug the stem diameter should exceed the bore hole by 0.2 - 0.8 mm. Used as a cap the inner diameter should be 0.2 - 0.8 mm smaller than the outer diameter you want to protect.

Drawing and Dimension Table

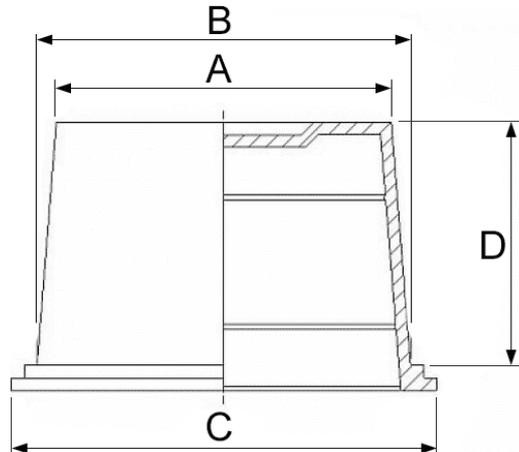

Attribute	Value
A	20,5 mm
B	23,3 mm
C	27,0 mm
D	16,0 mm



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at sales@emico.com or by phone at +49 9621 67545-0.

The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.