

Tapered plugs M33 / 26,4-29,2

Article Number: 300017211




Technical Data

Attribute	Value
RoHS	RoHS compliant
Colour	natural
Country of origin	Germany
Customs tariff number	39269097
Material	LDPE
Previous part number	4040264
Tolerance	0,3 - 0,8 mm
Weight	2 g
DIN	M30x1
DIN 13 regular type screw thread	M33
DIN 259 Whitworth pipe thread	M30x1
Bore diameter	26,4 - 29,2 mm
External diameter	33,0 mm
Immersion depth	19 mm
Shape	round
Stem form	conical

Description

The tapered series can either be used as a cap or a plug - depending on the application. It is perfectly suited for the protection of threads or to shield conduits and pipes from dirt and moisture. Many different dimensions for a lot of different types of threads. Please note: Tolerance = 0.3 - 0.8 mm Used as a plug the stem diameter should exceed the bore hole by 0.2 - 0.8 mm. Used as a cap the inner diameter should be 0.2 - 0.8 mm smaller than the outer diameter you want to protect.

Drawing and Dimension Table

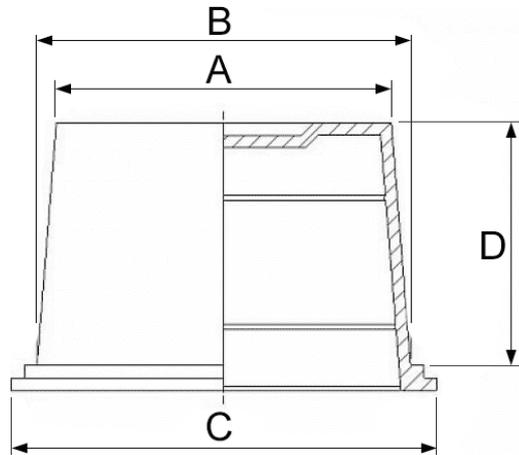

Attribute	Value
A	26,4 mm
B	29,2 mm
C	33,0 mm
D	19,0 mm



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at sales@emico.com or by phone at +49 9621 67545-0.

The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.