

# Tapered plugs 33,3-37,1

Article Number: 300017215




## Technical Data

| Attribute                     | Value          |
|-------------------------------|----------------|
| RoHS                          | RoHS compliant |
| Colour                        | natural        |
| Country of origin             | Germany        |
| Customs tariff number         | 39269097       |
| Material                      | LDPE           |
| Previous part number          | 4040333        |
| Tolerance                     | 0,3 - 0,8 mm   |
| Weight                        | 3,37 g         |
| DIN                           | M39x2/M40x3    |
| DIN 259 Whitworth pipe thread | M39x2/M40x3    |
| Bore diameter                 | 33,3 - 37,1 mm |
| External diameter             | 41,0 mm        |
| Immersion depth               | 22 mm          |
| Shape                         | round          |
| Stem form                     | conical        |

## Description

The tapered series can either be used as a cap or a plug - depending on the application. It is perfectly suited for the protection of threads or to shield conduits und pipes from dirt and moisture. Many different dimensions for a lot of different types of threads. Please note: Tolerance = 0.3 - 0.8 mm Used as a plug the stem diameter should exceed the bore hole by 0.2 - 0.8 mm. Used as a cap the inner diameter should be 0.2 - 0.8 mm smaller than the outer diameter you want to protect.

## Drawing and Dimension Table

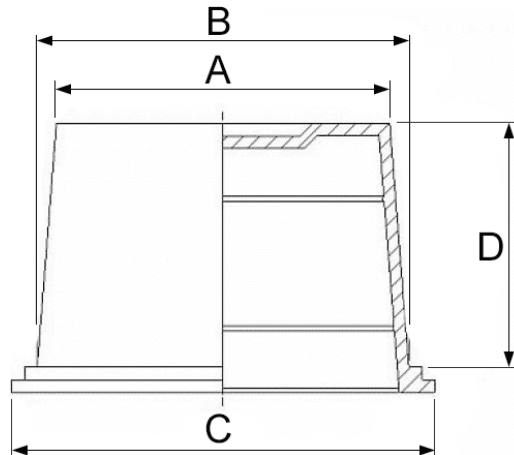

| Attribute | Value   |
|-----------|---------|
| A         | 33,3 mm |
| B         | 37,1 mm |
| C         | 41,0 mm |
| D         | 22,0 mm |



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at [sales@emico.com](mailto:sales@emico.com) or by phone at +49 9621 67545-0.

*The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.*