

Adjust. plug for round pipes 32x1,5-2 8k

Article Number: 300011662




Technical Data

Attribute	Value
RoHS	RoHS compliant
Colour	black
Country of origin	Germany
Customs tariff number	39235010
Material	PA
Previous part number	0600320
Weight	13,11 g
Max. load capacity	300 kg
Pipe external diameter	32 mm
Pipe wall thickness	2,0 mm
Shape	round
Thread length	25,0 mm
Thread size	M22
Thread type	integrated
Version	with adjustment screw
Width across flat	28

Description

One-piece external body with injection-moulded thread. Octagonal screw head Axial load capacity: up to max. 300 kg. Load capacity: - The adjustment of the feet has to be effected unloaded - The axial static load indicated refers to a screw that is unscrewed by 10 mm and is seated on plane ground - The adjustable plugs are unsuitable to be used as load gliders - The adjustable plugs are not suitable for dynamic load

Drawing and Dimension Table

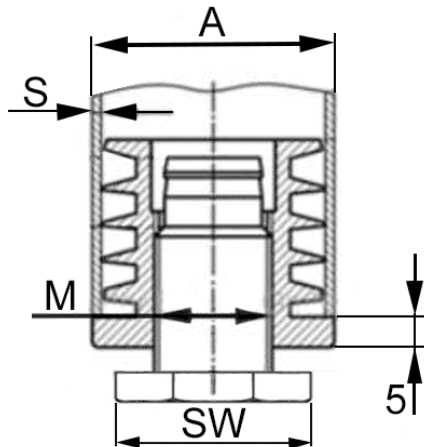

Attribute	Value
A x S	32x1,5-2 mm
M x L	M22x25 mm
SW	28



Scan the QR code to discover more items in this category.

For personalized advice, feel free to contact us at sales@emico.com or by phone at +49 9621 67545-0.

The information in this document is provided to the best of our knowledge, but without guarantee. Changes and errors reserved.